

Stereo Tuner

TU-6200



FEATURES

■ Features



- 40 Memory presets (FM / AM)
- 10-key memory quick access
- Channel AUTO SCAN and manual tuning
- MONO / STEREO selection function (FM)
- Button operation beep ON / OFF
- Wide viewing angle VFD's screen

- Stereo type RCA and XLR (Neutrik) Output Jacks
- RS-232 serial remote control terminal
- Power switch
- Detachable IEC standard power connector (ground)
- Standard 2U chassis

■ Included accessories

- AC power cable
- AM (300Ω) loop antenna
- FM (75Ω) Antenna

DRAWING

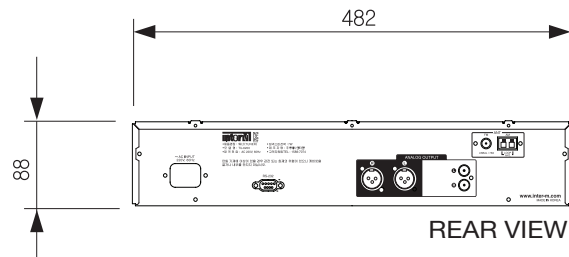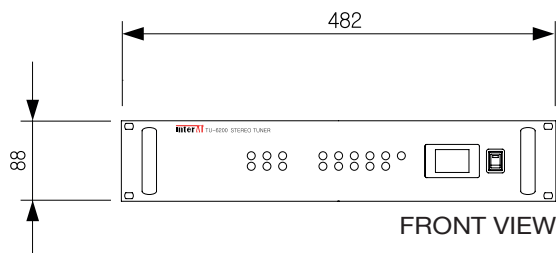

SPECIFICATIONS

FM (22.5kHz MOD, 1kHz)		Operation temperature	-10°C ~ +40°C / 14°F ~ 104°F
Tuning range	87.5~108.0MHz		
Sensitivity	2uV (Less than 10uV)	Power source	100~120VAC or 220~240VAC; 50/60Hz
T.H.D. (Mono)	0.2% (Less than 0.5%)		
S/N (Mono)	60dB (More than 50dB)	Power consumption	7W
Output level (75kHz MOD)	0dB±3 dB		
AM (30% MOD 400Hz)		Weight	4.2kg / 9.3lb
Tuning range	522~1629kHz		
Sensitivity	18uV (Less than 58uV)	Dimensions	482(W) x 88(H) x 280(D)mm 19(W) x 3.5(H) x 11(D)in
T.H.D. (Mono)	1% (Less than 2%)		
S/N (Mono)	50dB (More than 40dB)		
Output level (75kHz MOD)	-10dB±3 dB		

* Specifications and design are subject to change without notice.


interM

STEREO TUNER TU-6200

APPLICATION

■ 6000 system

– Audio and RS232 control connection of TU-6200 with 6000 system.

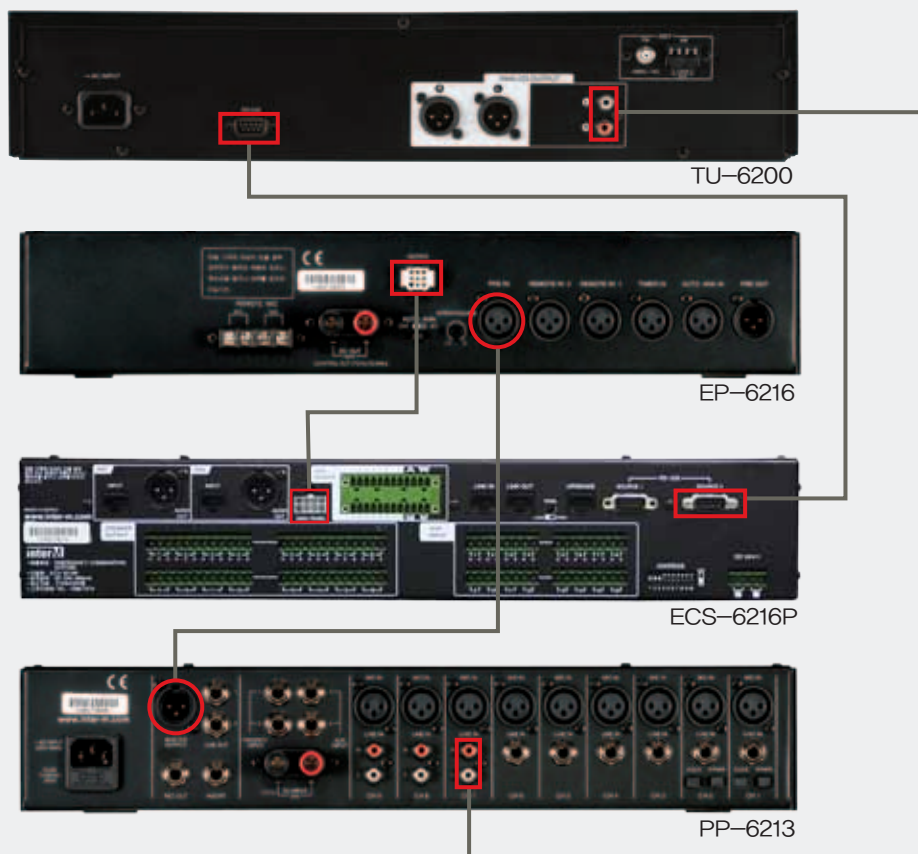

■ System 6000 Microsoft PC operation screen

– PC Control



Inter-M Corporation

- OFFICE: 653-5 BANGHAK-DONG, DOBONG-KU, SEOUL, KOREA
 - TEL : +82-2-2289-8140~8, FAX : +82-2-2289-8149
 - E-mail: overseas@inter-m.com