



BOSCH

Invented for life

LBB 9082/00 Unidirectional Gooseneck Microphone




- Unidirectional dynamic microphone
- Flexible stem
- Excellent speech reproduction
- Rugged construction
- Built-in pop shield
- Flange mounting
- Matt black finish

The gooseneck microphone is a stylish high quality unidirectional dynamic microphone, mainly intended for public address applications.


Functions

The flexible stem has an M10 screw fitting for mounting onto (fireman's) panels, lecterns or desktops.


Installation/Configuration Notes

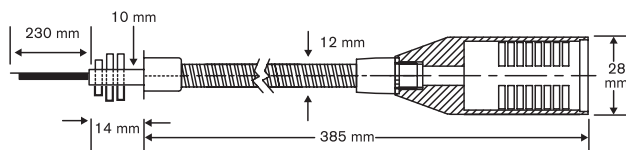

Dimensions in mm

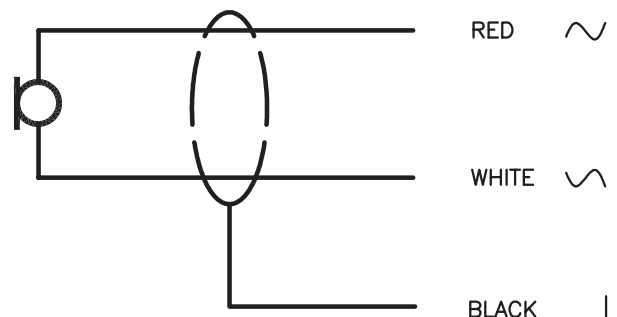

Circuit diagram

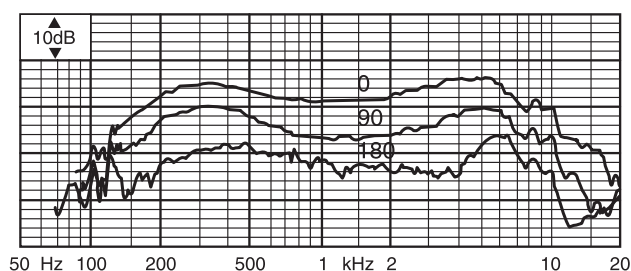

Frequency response

Technical Specifications

Electrical*

Type	Gooseneck
Polar pattern	Unidirectional
Frequency response	100 Hz to 15 kHz
Sensitivity	1.2 mV/Pa $\pm$ 4 dB
Rated output impedance	500 ohm

* Technical performance data acc. to IEC 60268-4

Mechanical

Dimensions	28 x 385 mm (1.10 x 15.16 in)
Weight	225 g (8 oz)
Color	Black
Cable type	2-core screened
Cable length	230 mm

Environmental

Operating temperature	-25 °C to +55 °C (-13 °F to +131 °F)
Storage temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Relative humidity	<95%

Ordering Information

LBB 9082/00 Unidirectional Gooseneck LBB9082/00

Microphone

unidirectional dynamic microphone with flexible stem

Americas:
Bosch Communications Systems
12000 Portland Avenue South
Burnsville, Minnesota 55337, USA
Phone: +1-800-392-3497
Fax: +1-800-955-6831
audiosupport@us.bosch.com
www.boschsecurity.com

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: +31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:
Robert Bosch (SEA) Pte Ltd
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2600
Fax: +65 6571 2698
apr.securitysystems@bosch.com
www.boschsecurity.com

Represented by