



## NovoTouch EK Series

4K UHD All-in-One  
Touch Panel

Wireless Collaboration  
BYOM | Digital Signage

The new NovoTouch EK series of interactive 4K displays offer the most complete solution for engaging hybrid meetings and classes.

The displays feature NovoConnect Wireless Collaboration, Video Conferencing, BYOM (optional) and NovoDS Digital Signage functionalities. NovoTouch is available in 65", 75" and 86" display sizes, all with UHD 4K resolution.

NovoTouch is designed to take business meetings and education sessions to a new level of collaboration and interaction.





## Key Features



### NovoConnect Wireless Collaboration

The NovoTouch EK series has built-in NovoConnect wireless presentation and collaboration tools for presentations and interactive engagement in the office or classroom.

Supports connections from 64 participants and up to 4 can share their screen simultaneously.




World Class Security- AES-256 Encryption, Password Protected, Dual Network Environment, ISO 27001 Certified.



### NT LiveScreen

Duplicate the NovoTouch screen (with NT LiveScreen\*) across the network to multiple displays (with NT LiveReceiver) in different rooms. This allows a large group of people to be split across breakout rooms and still share the same content.

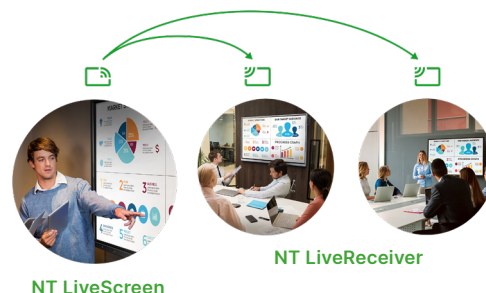

### NT Minutes

The NT Minutes app allows you to record any actions taken on the NovoTouch screen.

\* up to 6 screen duplication







### Bring Your Own Meeting (BYOM)

The BYOM driver is an optional upgrade to the NovoTouch. It enables the meeting moderator to control mainstream meeting peripherals such as cameras or audio devices directly from their laptop. Use with any video conferencing software such as Microsoft Teams, Zoom, Skype, Google meet or Webex for hybrid meeting and distance learning.

The BYOM driver is available for Windows and MacOS.



### NovoDS Digital Signage

The built-in digital signage solution is easy to set up and manage via the optional NovoDS Cloud service or included NovoDS Studio software.

The user can toggle between the Wireless Collaboration and Digital Signage function to maximise the use of the display at any time.



### 4K UHD display for perfect detail

When sharing single video content, the display supports 4K resolution, while in collaboration mode, each split screen is shown in 1080p Full HD resolution.



### Quality picture for optimal viewing and annotations

Backlit D-LED (IPS display) technology offers brighter pictures, flawless colours, richer textures, and extra wide viewing angles (178°/ 178°) with an incredibly sharp and crisp images.

Designed with Optical Bonding for better annotation and readability - high accuracy and fast response time.



# Product Specifications

Model Name			EK655i		EK755i		EK865i	
Display	Panel Size		65”		75”		86”	
	Type/Technology		Backlit D-LED (IPS- ADS)					
	Brightness		500 cd/m2					
	Contrast Ratio		5000:1					
	Native Resolution		4K Ultra-HD (3840 x 2160)					
	Viewing Angle (H/V)		178° / 178°					
	Aspect Ratio		16:9					
	Refresh Rate (Hz)		60 Hz					
	Estimated Life Time		50,000 hours   Digital Light Sensor embedded to auto detect ambient light and adjust display brightness for energy saving					
	Display Color (Bit)		1.07 Billion					
	Installation Orientation		Landscape					
	Daily Operation (Hours/Days)		16/7					
Touch	Technology		Infrared Touch					
	Touch Points	Annotation	10 Points					
		Finger Touch	20 Points					
	Accuracy	Finger	±1.0mm (Over 90% area)					
		Passive Pen						
	Response Time		≤ 6ms					
	Touch Resolution		32,768 x 32,768					
Surface Protection		4mm Thick Toughened Glass (Level 7H on Mohs Scale of Mineral Hardness)						
Touch Tools		Finger, Stylus, Glove, Opaque Objects						
Operating System	System Version		Android™ v11					
	Internal Storage		64GB (eMMC Flash)					
	Eternal USB		Yes (FAT32 / NTFS)					
Connectivity	Input	Display	HDMI v2.0 x3(HDCP v2.2 Compliant), USB-C x1, VGA-In (x1)					
		Audio						
	Output	Display	Audio-In (3.5mm) x1					
		Audio	HDMI-Out v1.4 x1 1080p@60Hz					
	Internet		Audio-Out (3.5mm) x1, SPDIF-Out x1					
	Control		LAN (RJ45, 10/100/1000M) x2					
	Wireless	WiFi (USB Module)	RS232-In x1					
		Bluetooth	WiFi 6; 802.11 a/b/g/n/ac/ax (2.4GHz/6GHz) USB dongle/ Built-in					
		I/R Receiver	V5.0					
	USB	Front	Front x1 (±25° Angle, >8m Distance)					
		Side	USB-A 2.0 x2					
Bottom		USB-A 3.0 x3, USB-B 2.0 x2 (For Touch Port), USB-C 3.1 (Power 65W) x1						
Default Apps	Wireless Collaboration		USB-A 3.0 x1, USB-B 2.0 x2 (For Touch Port)					
	Platform compatibility (BYOD)		Screen mirroring (NovoConnect SW/App), Screen duplication (up to 6) over the corporate network (NT LiveScreen/ NT LiveReceiver), White board (Note), Screen login protection (PIN Code / RFID / NFC Tag), Screen Recording (NT Minutes), BYOM (optional), Google Play, NT App Store					
	Digital Signage		Windows, Ubuntu, MacOS, Chromebook, iOS and Win 10 Miracast					
Expansion	Windows (OPS)		Digital signage (NovoDS)					
Audio	Speakers		Intel Standard 80 Pin OPS (Optional)					
Sensor	Light Sensor		16W x2 (Stereo)					
Device Management	Software/ Command		Yes					
Power	Power Supply (Internal)		AC 100 - 240V, 50/60Hz (3.0A)		AC 100 - 240V, 50/60Hz (4.0A)		AC 100 - 240V, 50/60Hz (4.5A)	
	Consumption		300W		400W		450W	
	Standby Mode		<0.5W (Standby)					
Physical Characteristics	Dimension (L x H x D) mm		1,488.7 x 897× 92		1,709.39 x 1,020.05 x 91.2		1,957.4 x 1,160.1 x 91.4	
	Weight		40.2 kg		52.2 kg		65.75 kg	
	VESA Mounting (FPMPI)		4 - M6 × 25mm, 600 x 400mm		6 – M8 × 25mm, 800 x 400mm			
	Color		Silver					
Accessories	Standard		AC Power Cord (3m), WiFi 6 USB Module, HDMI Cable,Touch USB Cable, Audio Cable, Stylus (x2), Remote Control (W/Batteries), Documentation Kit, Wall Mount Kit					
	Optional		LauncherPlus, LauncherOne					
Warranty	Standard		3-Year warranty on the panel					
	Education		5-Year warranty on the panel, where end customer is a school, university or training center. Education product registration required within 180 days of purchase for extended warranty to be valid.					

[www.vivitek.eu](http://www.vivitek.eu) | [www.novoconnect.eu](http://www.novoconnect.eu)

©2022 Vivitek. Vivitek is a trademark of Delta Electronics, Inc. Other trademarks are the properties of their respective owners. Values, weights and dimensions shown are approximate. Errors and omissions accepted. Specifications are subject to change without prior notice.

Reference number: 08/2022

A brand of  DELTA